



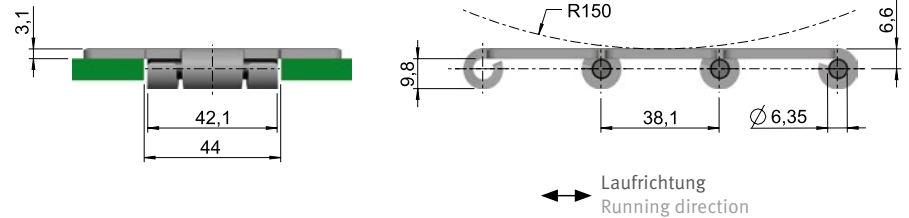


FLEXON® Scharnierbandkette Serie 812/815 GT/HS

Flat Top Chain Series 812/815 GT/HS

812/815 GT/HS

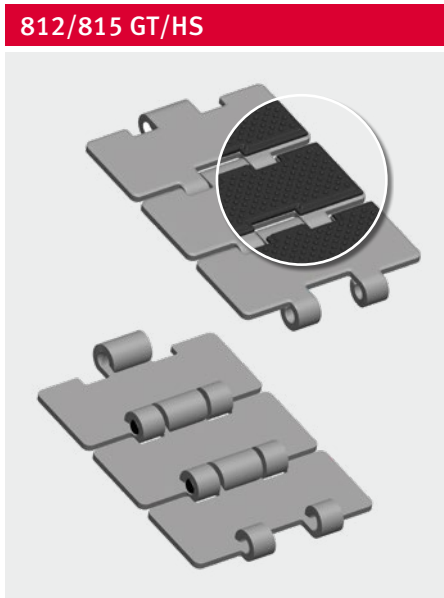

Gummierte Version (GT)
Grip top

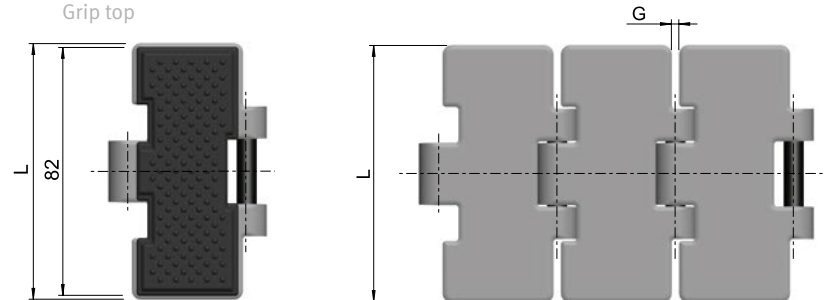

Werkstoff Kette Chain material	C45, Standard, Mega, Austenitic
Werkstoff Bolzen Pin material	Gehärteter Edelstahl Stainless steel hardened
Plattendicke Plate thickness	3,1 mm
Bolzendurchmesser Pin diameter	6,35 mm
Rückbiegeradius ¹ Back flex radius	150 mm
Spaltmaß (G) ¹ Gap (G)	1,6 mm
Standardlänge Standard length	80 Pitches (10 feet - 3,048 m)



68-71
94-95



107



110



114



CAD

¹ Bei SSR812-K325 Rückbiegeradius 75 mm und Spaltmaß 2,8 mm
For SSR812-K325 the backflex radius is 75 mm and the gap (G) is 2.8 mm

HS = High Speed
Oberflächenrauheit: Ra ≤ 0,18 micron
HS = High Speed
Roughness: Ra ≤ 0.18 micron

GT = Grip Top
Gummierte Oberfläche für hohen Reibwert
Max. Steigungswinkel 20°
GT = Grip Top
Rubber surface with high coefficient of friction
Inclines up to 20°

Kettentyp Chain ref	Werkstoff Material	Breite (L) Width		Durchschn. Streckgrenze Average yield load		Gewicht Weight	
		mm	inch	N	lbf	kg/m	lb/ft
S815-K250	C45	63,5	2 ½	12.300	2.765	2,18	1,46
S815-K325		82,5	3 ¼			2,65	1,78
S815-K350		88,9	3 ½			2,70	1,81
S815-K400		101,6	4			3,20	2,15
S815-K450		114,3	4 ½			3,40	2,28
S815-K600		152,4	6			4,40	2,96
S815-K750		190,5	7 ½			5,10	3,43
SS812-K250	Standard	63,5	2 ½	5.800	1.300	2,18	1,46
SS812-K325		82,5	3 ¼			2,65	1,78
SS812-K350		88,9	3 ½			2,70	1,81
SS812-K400		101,6	4			3,20	2,15
SS812-K450		114,3	4 ½			3,40	2,28
SS812-K600		152,4	6			4,40	2,96
SS812-K750		190,5	7 ½			5,10	3,43
SSR812-K325 ¹		82,5	3 ¼			2,65	1,78
Mega815-K250	Mega	63,5	2 ½	8.500	1.910	2,18	1,46
Mega815-K325		82,5	3 ¼			2,65	1,78
Mega815-K330		83,8	3 ⅜			2,65	1,78
Mega815-K350		88,9	3 ½			2,70	1,81
Mega815-K400		101,6	4			3,20	2,15
Mega815-K450		114,3	4 ½			3,40	2,28
Mega815-K600		152,4	6			4,40	2,96
Mega815-K750		190,5	7 ½			5,10	3,43
Mega815-K325 HS		82,5	3 ¼			2,65	1,78
Mega815-K330 HS		83,8	3 ⅜			2,65	1,78
Mega815-K325 GT		82,5	3 ¼			2,65	1,78
Mega815-K450 GT		114,3	4 ½			3,40	2,28
Mega815-K600 GT		152,4	6			4,40	2,96
Mega815-K750 GT		190,5	7 ½			5,10	3,43
SSA815-K250	Austenitic	63,5	2 ½	5.600	1.260	2,18	1,46
SSA815-K325		82,5	3 ¼			2,65	1,78
SSA815-K350		88,9	3 ½			2,70	1,81
SSA815-K400		101,6	4			3,20	2,15
SSA815-K450		114,3	4 ½			3,40	2,28
SSA815-K600		152,4	6			4,40	2,96
SSA815-K750		190,5	7 ½			5,10	3,43