





FLEXON® Scharnierbandkette Serie 879 TAB Flat Top Chain Series 879 TAB

879 TAB

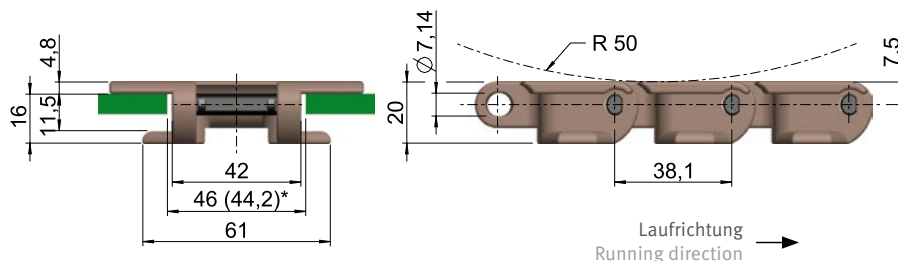

* 44,2 Kurve
Curve
46,0 Gerade
Straight

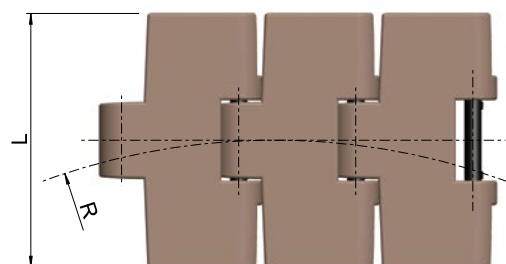

Werkstoff Kette Chain material	LF / KV ¹⁾
Werkstoff Bolzen Pin material	Edelstahl Stainless steel
Plattendicke Plate thickness	4,8 mm
Bolzendurchmesser Pin diameter	7,14 mm
Rückbiegeradius Back flex radius	50 mm
Min. Kurvenradius (R) Min. Curve radius	500 mm / 18"
Standardlänge Standard length	80 Pitches (10 feet - 3,048 m)

83-85
97-98

107



110



114



CAD

Kettentyp Chain ref	Werkstoff Material	Breite (L) Width		Durchschn. Bruchlast Average breaking load		Gewicht Weight	
		mm	inch	N	lbf	kg/m	lb/ft
LF879TAB-K325	LF	82,5	3 1/4	6.000	1.325	0,98	0,66
LF879TAB-K450		114,3	4 1/2			1,08	0,73
KV879TAB-K325	KV	82,5	3 1/4	6.000	1.325	0,98	0,66
KV879TAB-K450		114,3	4 1/2			1,08	0,73

SPEZIFIKATIONEN

- Scharnierbandketten der Serie 879 haben eine auf 4,8 mm verstärkte Platte und bieten somit eine um 20% höhere Verschleißlebensdauer als Scharnierbandketten der Serie 880
- 4,8 mm Plattendicke ermöglicht den Transfer auf Scharnierbandketten der Serien 821 / 831 / 882 / 8257
- Durch den an der Unterseite angebrachten TAB wird die Kette in der Kurve gehalten

CHARACTERISTICS

- Series 879 has thicker top plate of 4.8 mm offering 20% higher wear life than the original 880 series
- Series 879 offers matching transfer to 821 / 831 / 882 / 8257 series
- TAB shoe on the underside of the chain to hold down in curve tracks

¹⁾ Hinweis:

Auf Anfrage erhältlich in:
Anti Static (AS), High Temperature (HT),
Grey Acetal Basic (D) und Chemical Resistant (PP)

Note:

Available upon request in:
Anti Static (AS), High Temperature (HT),
Grey Acetal Basic (D) and Chemical Resistant (PP)