



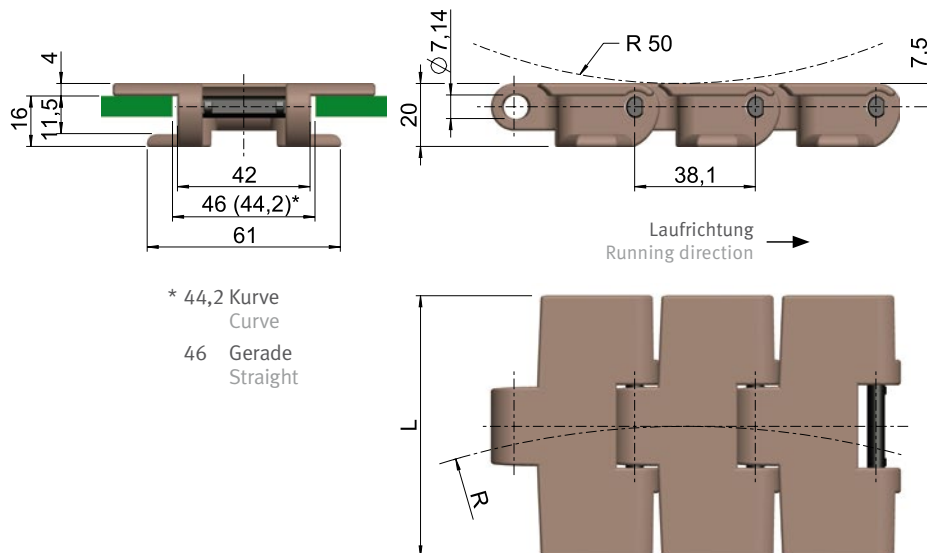

FLEXON® Scharnierbandkette Serie 880 TAB Flat Top Chain Series 880 TAB

880 TAB

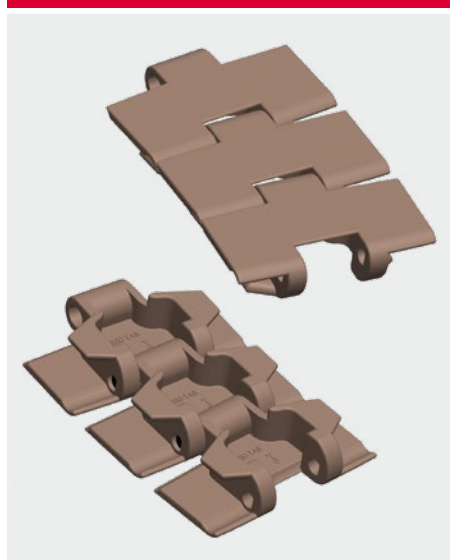

Werkstoff Kette Chain material	LF / KV ¹⁾
Werkstoff Bolzen Pin material	Edelstahl Stainless steel
Plattendicke Plate thickness	4 mm
Bolzendurchmesser Pin diameter	7,14 mm
Rückbiegeradius Back flex radius	50 mm
Min. Kurvenradius (R) Min. Curve radius	500 mm / 18"
Standardlänge Standard length	80 Pitches (10 feet - 3,048 m)



83-85
97-98



107



110



114



CAD

Kettentyp Chain ref	Werkstoff Material	Breite (L) Width		Durchschn. Bruchlast Average breaking load		Gewicht Weight	
		mm	inch	N	lbf	kg/m	lb/ft
LF880TAB-K325	LF	82,50	3 ¼	6.000	1.325	0,98	0,66
LF880TAB-K350		88,90	3 ½			1,01	0,68
LF880TAB-K450		114,30	4 ½			1,08	0,73
KV880TAB-K325	KV	82,50	3 ¼	6.000	1.325	0,98	0,66
KV880TAB-K450		114,30	4 ½			1,08	0,73

SPEZIFIKATIONEN

- Scharnierbandketten der Serie 880 haben eine Plattendicke von 4 mm
- Scharnierbandketten der Serie 880 ermöglichen den Transfer auf Scharnierbandketten der Serie 820
- Durch den an der Unterseite angebrachten TAB wird die Kette in der Kurve gehalten

CHARACTERISTICS

- Series 880 has traditional top plate thickness of 4 mm
- Series 880 offers matching transfer to 820 series
- TAB shoe on the underside of the chain to hold down in curve tracks

¹⁾ Hinweis:

Auf Anfrage erhältlich in:
Anti Static (AS), High Temperature (HT),
Grey Acetal Basic (D) und Chemical Resistant (PP)

Note:

Available upon request in:
Anti Static (AS), High Temperature (HT),
Grey Acetal Basic (D) und Chemical Resistant (PP)