




FLEXON® Scharnierbandkette Serie 880M Flat Top Chain Series 880M

880M

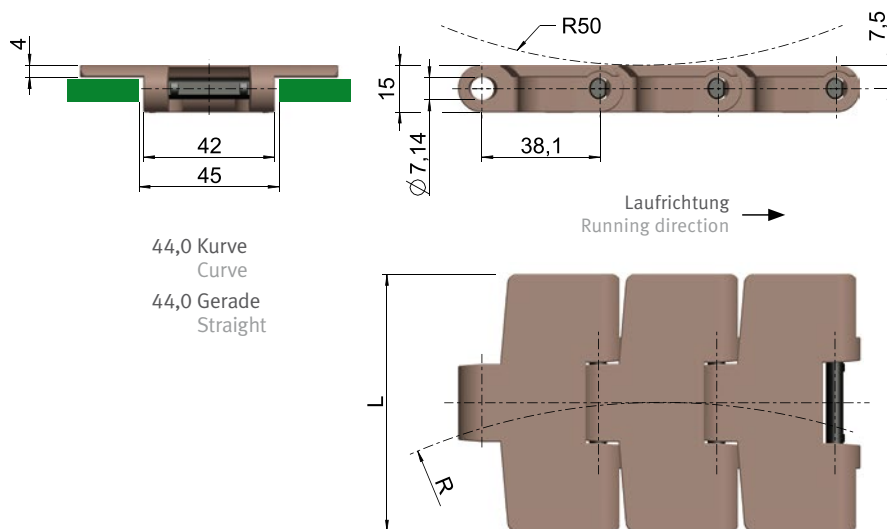

Werkstoff Kette Chain material	LF / KV ¹⁾
Werkstoff Bolzen Pin material	Edelstahl Stainless steel
Plattendicke Plate thickness	4 mm
Bolzendurchmesser Pin diameter	7,14 mm
Rückbiegeradius Back flex radius	50 mm
Min. Kurvenradius (R) Min. Curve radius	500 mm / 18"
Standardlänge Standard length	80 Pitches (10 feet - 3,048 m)



83-85
94-95



107



110



114



114

Kettentyp Chain ref	Werkstoff Material	Breite (L) Width		Durchschn. Bruchlast Average breaking load		Gewicht Weight	
		mm	inch	N	lbf	kg/m	lb/ft
LF880M-K325	LF	82,50	3 1/4	5.700	1.260	0,98	0,66
LF880M-K330		83,80	3 3/8			0,98	0,66
LF880M-K450		114,30	4 1/2			1,15	0,73
KV880M-K325	KV	82,50	3 1/4	5.700	1.260	0,98	0,66
KV880M-K330		83,80	3 3/8			0,98	0,66
KV880M-K450		114,30	4 1/2			1,15	0,73

SPEZIFIKATIONEN

- Scharnierbandketten der Serie 880 haben eine Plattendicke von 4 mm
- Scharnierbandketten der Serie 880 ermöglichen den Transfer auf Scharnierbandketten der Serie 820
- In Kurven wird die Kette durch Magnete gehalten
- Kann zum Reinigen einfach aus der Führung genommen werden

CHARACTERISTICS

- Series 880 has traditional top plate thickness of 4.0 mm
- Series 880 offers matching transfer to 820 series
- Chains are securely retained in the curve by permanent magnets
- Easily removable from curve for cleaning

¹⁾ Hinweis:

Auf Anfrage erhältlich in:
Anti Static (AS), High Temperature (HT),
Grey Acetal Basic (D) und Chemical Resistant (PP)

Note:

Available upon request in:
Anti Static (AS), High Temperature (HT),
Grey Acetal Basic (D) and Chemical Resistant (PP)