

No. 40 1/2" Pitch — Stainless Steel




Pitch	Inner width	Roller- ø
inch	inch	inch
1/2"	5/16"	.312"


▲ Has recessed groove in hub for chain clearance

Sprockets supplied without keyway and setscrews unless specifically requested.

TYPE A

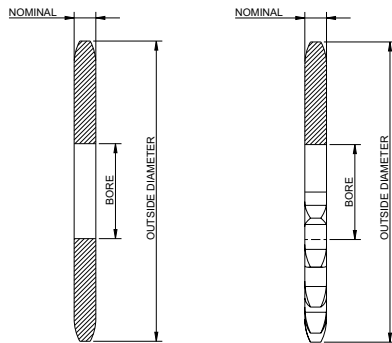

TYPE B

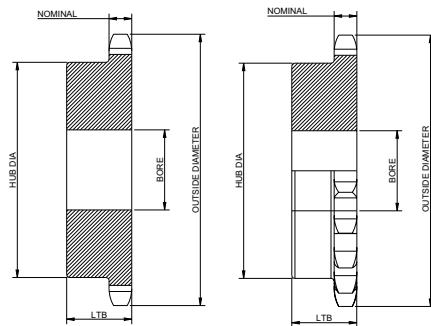

Single — Type B — Stainless Steel

Single — Type A

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Plain Bore	Max. Bore	Hub Dia.	LTB	Wt. Lbs.	Catalog Number	Stock Bore	Wt. Lbs.
10	1.840	1.618	40B10SS	1/2	3/4	▲ 1 1/4	7/8	.21			
11	2.000	1.775	40B11SS	1/2	7/8	▲ 1 3/8	7/8	.35			
12	2.170	1.932	40B12SS	1/2	1	▲ 1 9/16	7/8	.45			
13	2.330	2.089	40B13SS	1/2	1 1/16	1 9/16	7/8	.50			
14	2.490	2.247	40B14SS	1/2	1 1/8	1 11/16	7/8	.59			
15	2.650	2.405	40B15SS	1/2	1 1/4	1 13/16	7/8	.70			
16	2.810	2.563	40B16SS	5/8	1 3/8	2	7/8	.79			
17	2.980	2.721	40B17SS	5/8	1 7/16	2 1/8	1	1.04			
18	3.140	2.879	40B18SS	5/8	1 1/2	2 3/16	1	1.22			
19	3.300	3.038	40B19SS	5/8	1 3/4	2 1/2	1	1.43			
20	3.460	3.196	40B20SS	5/8	1 7/8	2 5/8	1	1.56			
21	3.620	3.355	40B21SS	5/8	1 7/8	2 3/4	1	1.73			
22	3.780	3.513	40B22SS	5/8	1 7/8	2 7/8	1	1.96			
23	3.940	3.672	40B23SS	5/8	2	3	1	2.13			
24	4.100	3.831	40B24SS	5/8	2 1/4	3 1/4	1	2.41	40A24SS	5/8	.82
25	4.260	3.989	40B25SS	5/8	2 1/4	3 1/4	1	2.54	40A25SS	5/8	.88
26	4.420	4.148	40B26SS	5/8	2 1/4	3 1/4	1	2.58	40A26SS	5/8	.94
28	4.740	4.465	40B28SS	5/8	2 1/4	3 1/4	1	2.73	40A28SS	5/8	1.10
30	5.060	4.783	40B30SS	5/8	2 1/4	3 1/4	1	2.98	40A30SS	19/32	1.26
35	5.860	5.578	40B35SS	5/8	2 1/4	3 1/4	1	3.46	40A35SS	19/32	1.70
40	6.650	6.373	40B40SS	3/4	2 3/8	3 1/2	1 1/8	4.69	40A40SS	23/32	2.22
45	7.450	7.168	40B45SS	3/4	2 3/8	3 1/2	1 1/8	5.30	40A45SS	23/32	3.15
60	9.840	9.554	40B60SS	3/4	2 3/8	3 1/2	1 1/8	7.86	40A60SS	23/32	5.48

Some sizes are Made-To-Order, consult iwis for availability.