

No. 40 1/2" Pitch — Tapered Bushing




Pitch	Inner width	Roller- ø
inch	inch	inch
1/2"	5/16"	.312"

▲ Has recessed groove in hub for chain clearance

Sprockets supplied without keyway and setscrews unless specifically requested.

TYPE B

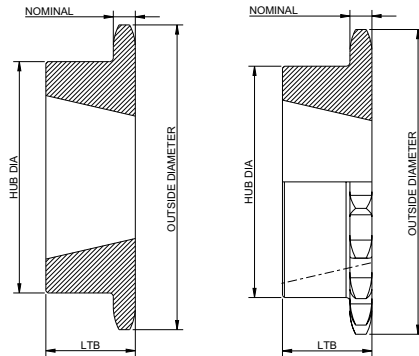

Type B Tapered Bushing

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
14	2.491	2.247	40BTL14	1008	1	▲ 1 13/16	7/8	.30
15	2.652	2.405	40BTL15	1008	1	1 13/16	7/8	.40
16	2.814	2.563	40BTL16	1008	1	1 15/16	7/8	.50
17	2.975	2.721	40BTL17	1210	1 1/4	▲ 2 3/8	1	.50
18	3.135	2.879	40BTL18	1210	1 1/4	▲ 2 15/32	1	.60
19	3.296	3.038	40BTL19	1210	1 1/4	2 15/32	1	.70
20	3.457	3.196	40BTL20	1610	1 5/8	▲ 2 25/32	1	.70
21	3.617	3.355	40BTL21	1610	1 5/8	2 25/32	1	.80
22	3.778	3.513	40BTL22	1610	1 5/8	2 25/32	1	.90
23	3.938	3.672	40BTL23	1610	1 5/8	3	1	1.00
24	4.098	3.831	40BTL24	1610	1 5/8	3 1/4	1	1.40
25	4.258	3.989	40BTL25	1610	1 5/8	3 1/4	1	1.50
26	4.418	4.148	40BTL26	1610	1 5/8	3 1/4	1	1.70
28	4.738	4.465	40BTL28	1610	1 5/8	3	1	1.80
30	5.057	4.783	40BTL30	1610	1 5/8	3	1	1.90
32	5.377	5.101	40BTL32	1610	1 5/8	3	1	1.90
35	5.855	5.578	40BTL35	1610	1 5/8	3	1	2.30
36	6.015	5.737	40BTL36	1610	1 5/8	3	1	2.40
40	6.653	6.373	40BTL40	1610	1 5/8	3	1	2.80
42	6.972	6.691	40BTL42	1610	1 5/8	3	1	2.90
45	7.451	7.168	40BTL45	1610	1 5/8	3	1	3.50
48	7.928	7.645	40BTL48	1610	1 5/8	3	1	4.00
54	8.885	8.599	40BTL54	1610	1 5/8	3	1	4.90
60	9.841	9.554	40BTL60	1610	1 5/8	3	1	6.00
70	11.434	11.145	40BTL70	2012	2	3 9/16	1 1/4	8.20
72	11.752	11.463	40BTL72	2012	2	3 9/16	1 1/4	9.00
80	13.026	12.736	40BTL80	2012	2	3 9/16	1 1/4	10.80
84	13.663	13.372	40BTL84	2012	2	3 9/16	1 1/4	11.30
96	15.573	15.282	40BTL96	2012	2	3 9/16	1 1/4	14.60
112	18.122	17.827	40BTL112	2517	2 1/2	4 1/4	1 3/4	20.50



Some sizes are Made-To-Order, consult iwis for availability.

No. 40 1/2" Pitch — Tapered Bushing



Pitch	Inner width	Roller- ø
inch	inch	inch
1/2"	5/16"	.312"

Sprockets supplied without keyway and setscrews unless specifically requested.



Double Tapered Bushing

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
15	2.652	2.405	D40ATL15	1008	1	1 17/64	7/8	.50
16	2.814	2.563	D40ATL16	1008	1	1 17/64	7/8	.60
17	2.975	2.721	D40ATL17	1008	1	1 17/64	7/8	.70
18	3.135	2.879	D40BTL18	1210	1 1/4	2 3/16	1	.70
19	3.296	3.038	D40BTL19	1210	1 1/4	2 1/2	1	.90
20	3.457	3.196	D40BTL20	1610	1 5/8	2 5/8	1	.90
21	3.617	3.355	D40BTL21	1610	1 5/8	2 3/4	1	1.00
23	3.938	3.672	D40BTL23	1610	1 5/8	3	1	1.30
25	4.258	3.989	D40BTL25	2012	2	3 13/32	1 1/4	1.60
30	5.057	4.783	D40BTL30	2012	2	4 15/64	1 1/4	3.40
36	6.015	5.737	D40BTL36	2012	2	5 5/32	1 1/4	5.90
42	6.972	6.691	D40CTL42	2517	2 1/2	4 1/4	1 3/4	7.00
48	7.928	7.645	D40CTL48	2517	2 1/2	4 1/4	1 3/4	9.60

Tapered Bushing

Bushing	Bore Range	Wt. Lbs.
1008	1/2 — 1	.30
1210	1/2 — 1 1/4	.60
1610	1/2 — 1 5/8	.90
2012	1/2 — 2	1.70
2517	1/2 — 2 1/2	3.50

Some sizes are Made-To-Order, consult iwis for availability.