

No. 60 $\frac{3}{4}$ " Pitch — Tapered Bushing




Pitch	Inner width	Roller- ø
inch	inch	inch
$\frac{3}{4}$ "	$\frac{1}{2}$ "	.469"

▲ Has recessed groove in hub for chain clearance

Sprockets supplied without keyway and setscrews unless specifically requested.

TYPE B

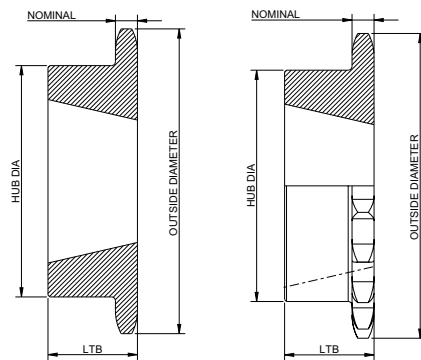


Type B Tapered Bushing

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
13	3.493	3.134	60BTL13	1210	1 $\frac{1}{4}$	▲ 2 $\frac{15}{32}$	1	.80
14	3.736	3.371	60BTL14	1210	1 $\frac{1}{4}$	2 $\frac{15}{32}$	1	1.00
15	3.979	3.608	60BTL15	1610	1 $\frac{5}{8}$	2 $\frac{25}{32}$	1	1.00
16	4.221	3.845	60BTL16	1610	1 $\frac{5}{8}$	3	1	1.40
17	4.462	4.082	60BTL17	1610	1 $\frac{5}{8}$	3 $\frac{1}{4}$	1	1.80
18	4.704	4.319	60BTL18	1610	1 $\frac{5}{8}$	3 $\frac{1}{4}$	1	1.90
19	4.945	4.557	60BTL19	1610	1 $\frac{5}{8}$	3 $\frac{1}{4}$	1	2.20
20	5.185	4.794	60BTL20	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	2.20
21	5.426	5.033	60BTL21	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	2.50
22	5.666	5.270	60BTL22	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	2.80
23	5.907	5.508	60BTL23	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	3.10
24	6.147	5.746	60BTL24	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	3.40
25	6.387	5.984	60BTL25	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	3.70
26	6.627	6.222	60BTL26	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	4.00
27	6.867	6.461	60BTL27	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	4.20
28	7.107	6.698	60BTL28	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	4.60
30	7.586	7.175	60BTL30	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	5.20
32	8.065	7.652	60BTL32	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	5.60
35	8.783	8.367	60BTL35	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	6.40
36	9.022	8.606	60BTL36	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	6.60
40	9.980	9.560	60BTL40	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	8.30
42	10.458	10.037	60BTL42	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	10.00
45	11.175	10.752	60BTL45	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	11.50
48	11.893	11.468	60BTL48	2012	2	3 $\frac{9}{16}$	1 $\frac{1}{4}$	13.20
54	13.327	12.889	60BTL54	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	1 $\frac{3}{4}$	17.10
60	14.761	14.330	60BTL60	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	1 $\frac{3}{4}$	21.00
70	17.150	16.717	60BTL70	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	1 $\frac{3}{4}$	27.60
72	17.628	17.195	60BTL72	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	1 $\frac{3}{4}$	30.00
80	19.539	19.103	60BTL80	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	1 $\frac{3}{4}$	36.30
84	20.494	20.058	60BTL84	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	1 $\frac{3}{4}$	40.60



Some sizes are Made-To-Order, consult iwis for availability.

No. 60 $\frac{3}{4}$ " Pitch — Tapered Bushing

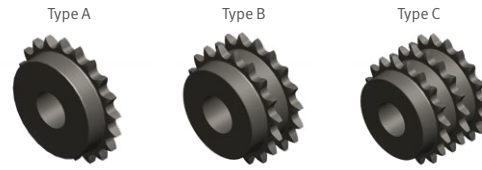

Pitch	Inner width	Roller- ø
inch	inch	inch
$\frac{3}{4}$ "	$\frac{1}{2}$ "	.469"

Sprockets supplied without keyway and setscrews unless specifically requested.



Double Tapered Bushing

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	Type	LTB	Wt. Lbs.
13	3.493	3.134	D60BTL13	1215	1 $\frac{1}{4}$	2 $\frac{1}{4}$	B	1 $\frac{1}{2}$	1.20
14	3.736	3.371	D60BTL14	1215	1 $\frac{1}{4}$	2 $\frac{1}{2}$	B	1 $\frac{1}{2}$	1.60
15	3.979	3.608	D60BTL15	1615	1 $\frac{5}{8}$	2 $\frac{13}{16}$	B	1 $\frac{1}{2}$	1.30
16	4.221	3.845	D60BTL16	1615	1 $\frac{5}{8}$	3	B	1 $\frac{1}{2}$	2.20
17	4.462	4.082	D60BTL17	1615	1 $\frac{5}{8}$	3 $\frac{1}{4}$	B	1 $\frac{1}{2}$	2.50
18	4.704	4.319	D60ATL18	2012	2		A	1 $\frac{1}{4}$	3.00
19	4.945	4.557	D60ATL19	2012	2		A	1 $\frac{1}{4}$	3.50
20	5.185	4.794	D60BTL20	2517	2 $\frac{1}{2}$	3 $\frac{61}{64}$	B	1 $\frac{3}{4}$	4.00
21	5.426	5.033	D60BTL21	2517	2 $\frac{1}{2}$	4 $\frac{3}{16}$	B	1 $\frac{3}{4}$	5.00
25	6.387	5.984	D60BTL25	2517	2 $\frac{1}{2}$	5 $\frac{5}{32}$	B	1 $\frac{3}{4}$	7.50
30	7.586	7.175	D60BTL30	2517	2 $\frac{1}{2}$	6 $\frac{11}{32}$	B	1 $\frac{3}{4}$	13.50
36	9.022	8.606	D60CTL36	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	C	1 $\frac{3}{4}$	17.50
42	10.458	10.037	D60CTL42	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	C	1 $\frac{3}{4}$	25.50
45	11.176	10.752	D60CTL45	2517	2 $\frac{1}{2}$	4 $\frac{1}{4}$	C	1 $\frac{3}{4}$	29.50

Tapered Bushing

Bushing	Bore Range	Wt. Lbs.
1215	$\frac{1}{2}$ — 1 $\frac{1}{4}$	.60
1615	$\frac{1}{2}$ — 1 $\frac{5}{8}$	1.00
2012	$\frac{1}{2}$ — 2	1.40
2517	$\frac{1}{2}$ — 2 $\frac{1}{2}$	3.20

Some sizes are Made-To-Order, consult iwis for availability.