

No. 80 1" Pitch — Tapered Bushing




Pitch	Inner width	Roller- ø
inch	inch	inch
1"	5/8"	.625"

▲ Has recessed groove in hub for chain clearance

Sprockets supplied without keyway and setscrews unless specifically requested.

TYPE B

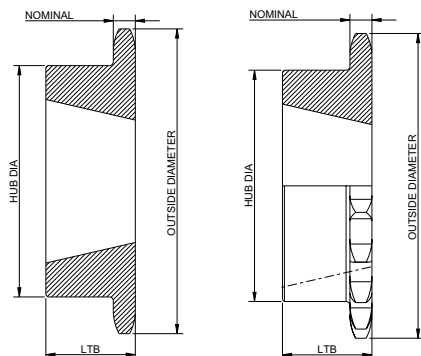

80 Type B Tapered Bushing

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
10	3.678	3.236	80BTL10	1215	1 1/4	▲ 2 3/8	1 1/2	1.10
11	4.006	3.550	80BTL11	1215	1 1/4	▲ 2 15/32	1 1/2	1.50
12	4.332	3.864	80BTL12	1615	1 5/8	▲ 3	1 1/2	1.80
13	4.657	4.179	80BTL13	1615	1 5/8	3	1 1/2	2.30
14	4.982	4.494	80BTL14	1615	1 5/8	3 1/4	1 1/2	2.50
15	5.305	4.810	80BTL15	1615	1 5/8	3 1/4	1 1/2	2.70
16	5.627	5.126	80BTL16	2012	2	3 9/16	1 1/4	2.80
17	5.950	5.442	80BTL17	2012	2	3 9/16	1 1/4	3.10
18	6.271	5.759	80BTL18	2012	2	3 9/16	1 1/4	3.60
19	6.593	6.076	80BTL19	2012	2	3 9/16	1 1/4	4.10
20	6.914	6.392	80BTL20	2517	2 1/2	4 1/4	1 3/4	5.50
21	7.235	6.710	80BTL21	2517	2 1/2	4 1/4	1 3/4	6.00
22	7.555	7.027	80BTL22	2517	2 1/2	4 1/4	1 3/4	6.50
23	7.875	7.344	80BTL23	2517	2 1/2	4 1/4	1 3/4	7.00
24	8.196	7.661	80BTL24	2517	2 1/2	4 1/4	1 3/4	7.50
25	8.516	7.979	80BTL25	2517	2 1/2	4 1/4	1 3/4	8.10
26	8.836	8.296	80BTL26	2517	2 1/2	4 1/4	1 3/4	8.80
27	9.156	8.614	80BTL27	2517	2 1/2	4 1/4	1 3/4	9.00
28	9.475	8.931	80BTL28	2517	2 1/2	4 1/4	1 3/4	9.50
30	10.114	9.567	80BTL30	2517	2 1/2	4 1/4	1 3/4	11.50
32	10.753	10.202	80BTL32	2517	2 1/2	4 1/4	1 3/4	12.00
35	11.711	11.156	80BTL35	2517	2 1/2	4 1/4	1 3/4	15.20
36	12.030	11.471	80BTL36	2517	2 1/2	4 1/4	1 3/4	17.00
40	13.306	12.746	80BTL40	2517	2 1/2	4 1/4	1 3/4	21.00
45	14.901	14.336	80BTL45	2517	2 1/2	4 1/4	1 3/4	26.50
48	15.857	15.290	80BTL48	2517	2 1/2	4 1/4	1 3/4	29.50
54	17.769	17.198	80BTL54	2517	2 1/2	4 1/4	1 3/4	38.50
60	19.681	19.107	80BTL60	2517	2 1/2	4 1/4	1 3/4	45.00
70	22.867	22.289	80BTL70	3020	3	5 1/4	2	52.30
80	26.052	25.471	80BTL80	3020	3	5 1/4	2	69.20

Tapered Bushing

Bushing	Bore Range	Wt. Lbs.
1615	1/2 — 1 1/4	1.20
2012	1/2 — 2	1.70
2517	1/2 — 2 1/2	3.50
3020	15/16 — 3	6.50

Some sizes are Made-To-Order, consult iwis for availability.



No. 80 1" Pitch — Tapered Bushing



80 Double Tapered Bushing

Pitch	Inner width	Roller- ø
inch	inch	inch
1"	5/8"	.625"

Sprockets supplied without keyway and setscrews unless specifically requested.



No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
13	4.657	4.179	D80ATL13	1615	1 5/8		1 1/2	3.40
14	4.982	4.494	D80ATL14	2012	2		1 3/4	3.50
15	5.305	4.810	D80ATL15	2012	2		1 3/4	4.30
16	5.627	5.126	D80ATL16	2517	2 1/2		1 3/4	3.80
17	5.950	5.442	D80ATL17	2517	2 1/2		1 3/4	5.10
18	6.271	5.759	D80ATL18	2517	2 1/2		1 3/4	6.40
19	6.593	6.076	D80BTL19	3020	3	5	2	5.60
20	6.914	6.392	D80BTL20	3020	3	5 1/4	2	7.10
21	7.235	6.710	D80BTL21	3020	3	5 9/16	2	8.90
25	8.516	7.979	D80BTL25	3020	3	6 7/8	2	16.50

Tapered Bushing

Bushing	Bore Range	Wt. Lbs.
1615	1/2 — 1 5/8	1.20
2012	1/2 — 2	1.70
2517	1/2 — 2 1/2	3.50
3020	1 5/16 — 3	6.50

Some sizes are Made-To-Order, consult iwis for availability.