

No. 100 1 1/4" Pitch — Tapered Bushing




Pitch	Inner width	Roller- ø
inch	inch	inch
1 1/4"	3/4"	.750"

Sprockets supplied without keyway and setscrews unless specifically requested.

100 Type B Tapered Bushing

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Bushing	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
11	5.007	4.438	100BTL11	1615	1 3/8	3	1 1/2	2.70
12	5.415	4.830	100BTL12	1615	1 3/8	3 1/4	1 1/2	3.50
13	5.821	5.224	100BTL13	2012	2	3 9/16	1 3/4	3.60
14	6.227	5.618	100BTL14	2012	2	3 9/16	1 3/4	3.90
15	6.631	6.013	100BTL15	2517	2 1/2	4 1/4	1 3/4	5.00
16	7.034	6.408	100BTL16	2517	2 1/2	4 1/2	1 3/4	6.40
17	7.437	6.803	100BTL17	2517	2 1/2	4 1/2	1 3/4	7.10
18	7.839	7.199	100BTL18	2517	2 1/2	4 1/2	1 3/4	7.80
19	8.241	7.595	100BTL19	2517	2 1/2	4 1/2	1 3/4	8.70
20	8.642	7.990	100BTL20	2517	2 1/2	4 1/2	1 3/4	9.60
21	9.043	8.388	100BTL21	2517	2 1/2	4 1/2	1 3/4	10.60
22	9.444	8.784	100BTL22	2517	2 1/2	4 1/2	1 3/4	11.00
24	10.245	9.576	100BTL24	2517	2 1/2	4 1/2	1 3/4	13.00
26	11.045	10.370	100BTL26	2517	2 1/2	4 1/2	1 3/4	15.00
28	11.844	11.164	100BTL28	3020	3	5 1/4	2	16.50
30	12.643	11.959	100BTL30	3020	3	5 1/4	2	22.00
32	13.442	12.753	100BTL32	3020	3	5 1/4	2	23.00
35	14.639	13.945	100BTL35	3020	3	5 1/4	2	28.00
36	15.038	14.343	100BTL36	3020	3	5 1/4	2	31.00
40	16.633	15.933	100BTL40	3020	3	5 1/4	2	37.00
45	18.626	17.920	100BTL45	3020	3	5 1/4	2	46.00
48	19.821	19.113	100BTL48	3020	3	5 1/4	2	53.00
54	22.212	21.498	100BTL54	3020	3	5 1/4	2	62.00
60	24.601	23.884	100BTL60	3020	3	5 1/4	2	72.00

TYPE B

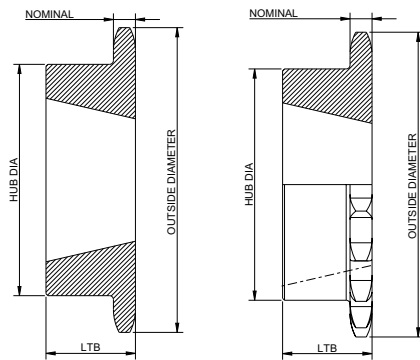

Tapered Bushing

Bushing	Bore Range	Wt. Lbs.
1615	1/2 — 1 3/8	1.00
2012	1/2 — 2	1.40
2517	1/2 — 2 1/2	3.20
3020	1 5/16 — 3	5.80

Some sizes are Made-To-Order, consult iwis for availability.