


No. 25 1/4" Pitch — Stainless Steel



Pitch	Inner width	Roller- ø
inch	inch	inch
1/4"	1/8"	.130"

Sprockets supplied without keyway and setscrews unless specifically requested.

TYPE B

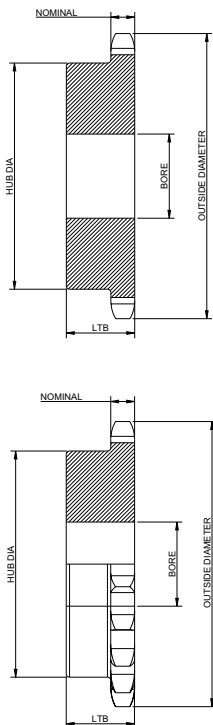

Single — Type B — Stainless Steel

No. Teeth	Outside Diameter	Pitch Diameter	Catalog Number	Plain Bore	Max. Bore	Hub. Dia.	LTB	Wt. Lbs.
9	.837	.731	25B9SS	1/4	1/4	7/16	1/2	.03
10	.919	.809	25B10SS	1/4	1/4	1/2	1/2	.03
11	1.002	.887	25B11SS	1/4	5/16	9/16	1/2	.04
12	1.083	.966	25B12SS	1/4	3/8	5/8	1/2	.06
13	1.167	1.045	25B13SS	1/4	7/16	23/32	1/2	.07
14	1.246	1.123	25B14SS	1/4	9/16	15/16	1/2	.08
15	1.326	1.203	25B15SS	1/4	9/16	7/8	1/2	.10
16	1.407	1.282	25B16SS	1/4	9/16	31/32	1/2	.12
17	1.487	1.361	25B17SS	1/4	5/8	1 1/32	1/2	.14
18	1.568	1.440	25B18SS	1/4	3/4	1 1/8	1/2	.16
19	1.648	1.519	25B19SS	1/4	13/16	1 7/32	1/2	.19
20	1.729	1.598	25B20SS	1/4	7/8	1 9/32	5/8	.25
21	1.809	1.677	25B21SS	1/4	7/8	1 3/8	5/8	.28
22	1.889	1.757	25B22SS	1/4	15/16	1 7/16	5/8	.31
23	1.969	1.836	25B23SS	1/4	1	1 1/2	5/8	.32
24	2.049	1.915	25B24SS	3/8	1	1 1/2	5/8	.33
25	2.129	1.995	25B25SS	3/8	1	1 1/2	5/8	.34
26	2.209	2.074	25B26SS	3/8	1	1 1/2	5/8	.35
28	2.369	2.233	25B28SS	3/8	1	1 1/2	5/8	.36
30	2.529	2.392	25B30SS	3/8	1	1 1/2	5/8	.38
36	3.008	2.868	25B36SS	3/8	1	1 1/2	3/4	.46
40	3.327	3.186	25B40SS	1/2	1 3/8	2	3/4	.54
45	3.725	3.584	25B45SS	1/2	1 3/8	2	3/4	.67
60	4.920	4.777	25B60SS	1/2	1 3/8	2	3/4	1.10

Some sizes are Made-To-Order, consult iwis for availability.